

PCF 200

PCF 200 M | dati di targa motore • motor label data

max. Hm	16,5
max. l/min	770
max. m ³ /h	46,2
~1 Amp.	10,5
HP	2,96
Kw	2,2

PCF 200 T | dati di targa motore • motor label data

max. Hm	16,5
max. l/min	770
max. m ³ /h	46,2
~3 Amp.	9,8-3,5
HP	2,96
Kw	2,2



CSV



Pompe centrifughe ad alta portata:
per idromassaggio o impianti di nuoto
controcorrente in piscine.

Costruite in conformità alle Norme di Sicurezza
Europee EN, Produzione sorvegliata dall'IMQ.

- Temperatura acqua max. 60°C
- Valore pH dell' acqua 3-10
- Pressione d'esercizio max. 3bar

Specifiche:

- disponibile con motore elettrico trifase o monofase
- raccordi con filetto gas adatti per
raccorderia commerciale.

High flow centrifugal pumps:

For hydro massage or counter swimming
plants on swimming pools.

Built in conformity to European Security Norms
under surveillance of IMQ.


- max. Water temperature 60°C
- water pH value: 3-10
- Exercise pressure max. 3bar

Specifications:


- available with single or three phase motors
- threaded connections suitable for commercial
fittings

diagramma prestazioni • performance diagram

~1 / ~3

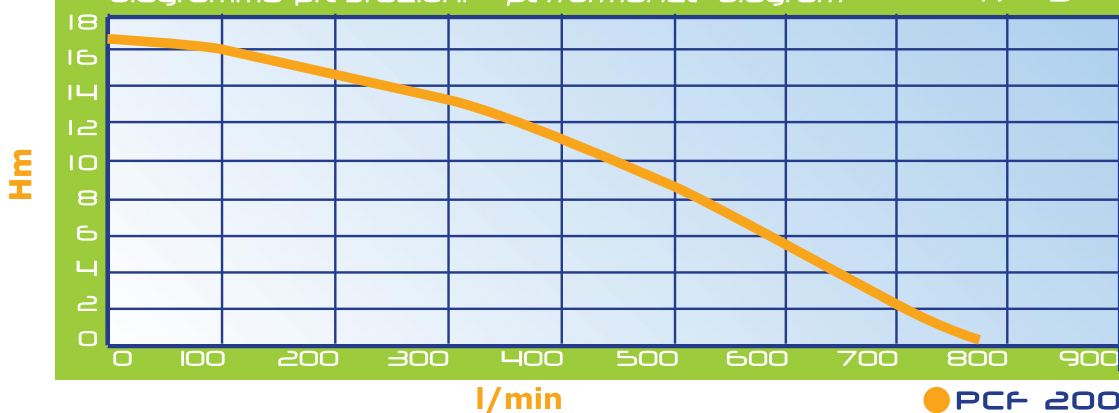

DIMENSIONI

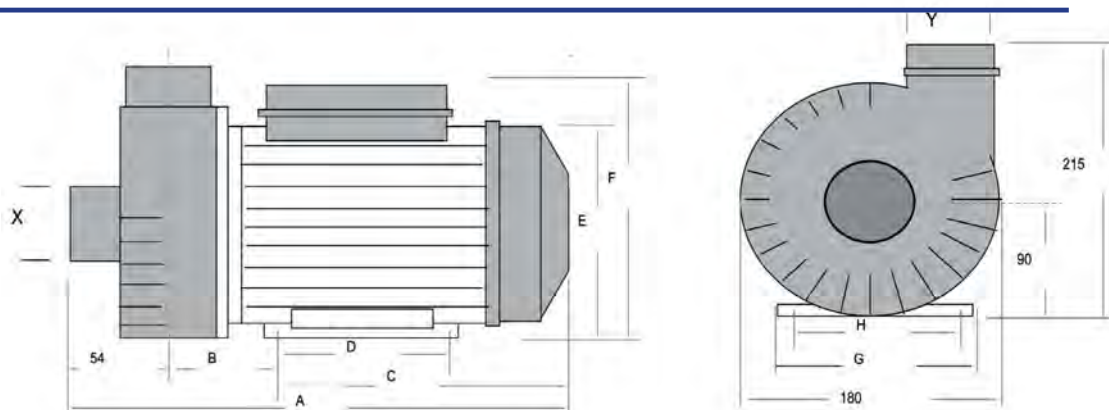

	A	B	C	D	E	F	G	H	X	Y
PCF 200	375	110	190	100	150	215	150	125	M 2"	M 2"