

PCF 101/121

PCF 101 dati di targa motore • motor label data

max. Hm	10,8
max. l/min	301
max. m³/h	18
~1 Amp.	4,6
HP	1,35
Kw	0,99

PCF 121 dati di targa motore • motor label data

max. Hm	13,5
max. l/min	315
max. m³/h	18,90
~1 Amp.	5
HP	1,5
Kw	1,1

**Dati caratteristici pompa e motore**

- **Pompa** ad alte prestazioni con filtro per ricircolo.
- Per piscine da piccole fino a media dimensione.
- Tutte le parti a contatto con l'acqua pompata sono costruite con materiali inattaccabili da corrosione.
- Temperatura acqua max. 60°C.
- Valore pH dell'acqua 3-10.
- Pressione massima d'esercizio 3 bar.

Pump and motor features


- **Pump** with high performance for filter systems.
- For small to medium sized swimming pools.
- All parts in contact with pumped water are made out of not corrosive materials.
- Max. water temperature 60°C.
- pH value 3-10.
- Max. exercise pressure 3 bar.




CSV



diagramma prestazioni • performance diagram 230V/50HZ/1

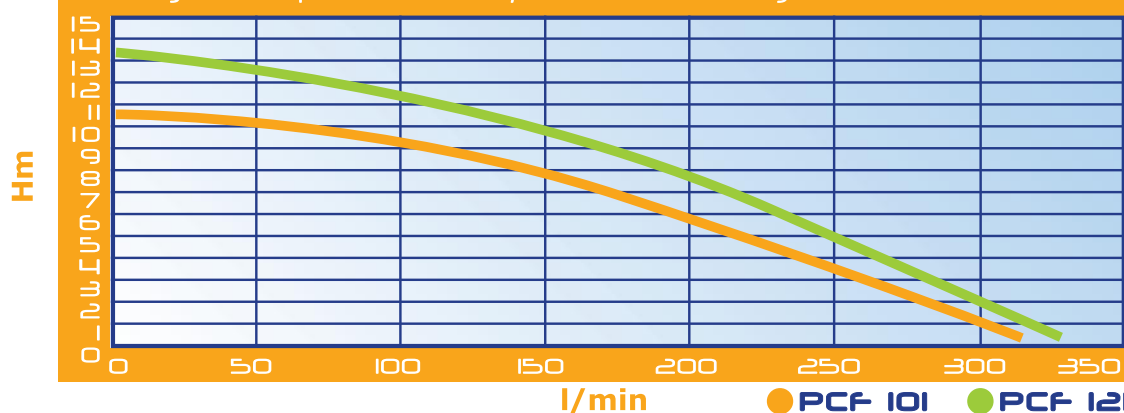

DIMENSIONI

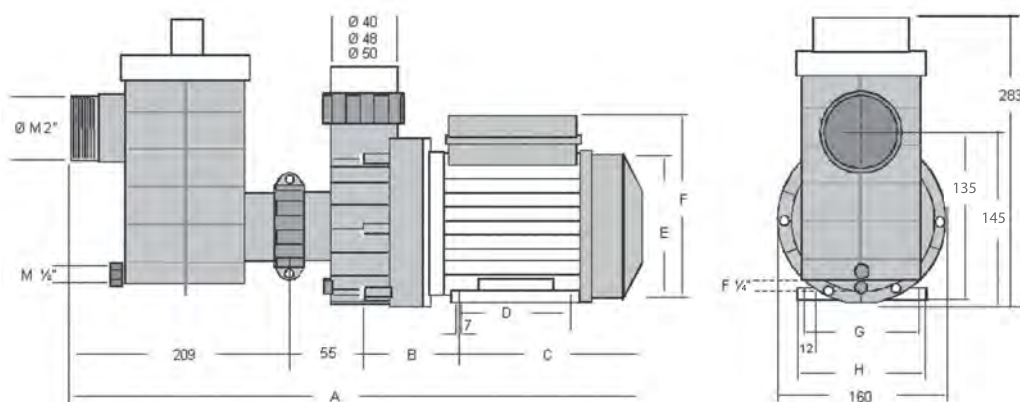

	A	B	C	D	E	F	G	H
PCF 101	543	95	173	90	135	178	136	111
PCF 121	543	95	173	90	135	178	136	111